



**Faster Image Printing  
Improved Functions**

# SRP-350II



*SRP-350II is a successor of the best selling model SRP-350. BIXOLON SRP-350II is a 3inch thermal receipt printer to provide all you need. The biggest benefit from SRP-350II is improved printing speed. Not only Text printing speed, but also Image printing speed became up to 200mm/sec. Smart Windows driver and other various drivers make BIXOLON SRP-350II thermal receipt printer even more attractive and special. Quicker speed and better reliability, you can expect from a leading manufacturer. The SRP-350II thermal receipt printer offers simplicity for operator with Easy-paper-loading and ease of USB 2.0 connectivity with interchangeable interfaces and industry standard drivers. The modern design and small footprint enhance any environment.*

## HIGHLIGHTS

- Fast printing speed up to 200mm per second
  - Easy drop in paper loading
    - Simple paper jam removal
  - Various interface cards (Serial / Parallel / USB, Ethernet, Powered USB)
  - USB 2.0 Support
  - 2D barcode printing
    - PDF417
    - QR Code
  - Value-added options available
    - Melodist with 15 different melodies
    - SMPS cover for built-in power supply
    - Vertical stand for front exit face up
    - Wall mount bracket for limited space
  - SRP-350II PSP (POS Software Package) Launcher Available
    - Intelligent Interface Auto-installer
    - Reverse Printing (Rotation)
    - Margin Crop
    - Text & Image Macro
  - User-friendly software tools
    - Virtual Memory Switch Manager (VMSM)
    - NV image download
    - Full version of drivers supported
- Windows Driver, OPOS Driver, JPOS Driver, Linux Cups Driver, Mac Driver

## PRODUCT FEATURES

### Image printing speed up to 200mm/sec

To save your precious time, the SRP-350II improves its text printing speed and image speed as well. It's 25% quicker speed than the previous model of BIXOLON SRP-350. For market's trends and needs, SRP-350II is the proper and cost effective item.

### Confidence in its Reliability, SRP-350II

Enjoy better Reliability with SRP-350II. 70 million lines printer unit and 1.5 million lines auto-cutter available.

### High-speed USB 2.0 Support

BIXOLON SRP-350II using USB 2.0 with a High Speed of 480Mbps.


Choose Serial/Parallel/Ethernet/USB Interface card for your business convenience.



USB 2.0

### SRP-350II PSP(POS Software Package) Launcher Available

POS Software Package has many valuable and convenient functions. Intelligent Interface Auto-installer, Reverse Printing(Rotation), Barcode Setting, Margin Crop (Paper saving function), Text & Image Macro, NV Image management all available.

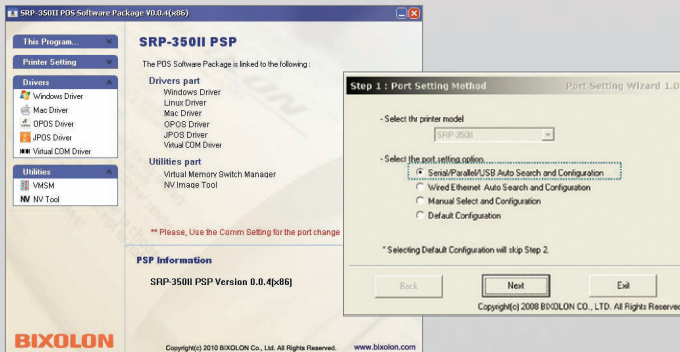

### Mac Driver (Mac OS X V10.4, 10.5, 10.6) Support!

Smart windows driver, OPOS driver, JPOS driver, Linux CUPS driver and Mac driver. Expand your business area with SRP-350II.

## SPECIFICATIONS

### PRINT

- PRINTING METHOD : Direct thermal
- PRINTING SPEED : 200mm/sec
- RESOLUTION : Standard : 180dpi(7dot/mm)
- CHARACTER SIZE : Font A : 12 x 24 / Font B : 9 x 17 / Font C : 9 x 24  
Korean : 24 x 24 / Chinese : 24 x 24
- CHARACTERS PER LINE :  
Font A : 42 / Font B : 56 / Font C : 56, Korean : 21 / Chinese : 21
- CHARACTER SET : Alphanumeric Character : 95  
Extended Character : 128 x 37 pages  
International Character : 32
- BARCODES :  
1D : EAN-13, EAN-8, Code 39, Code 93, Code 128, ITF,  
Coda Bar, UPC-A, UPC-E  
2D : PDF417, QR Code

### PAPER

- WIDTH : 80mm
- PAPER ROLL DIAMETER : Max Ø 83mm
- PAPER LOADING : Easy Paper Loading

### RELIABILITY

- PRINTER UNIT : 70 million lines
- TPH : 150 Km
- AUTO CUTTER : 1.8 million cuts

**INTERFACE :** Serial(RS-232C) / Parallel (IEEE 1284) /  
USB 2.0 / Ethernet

**RECEIVE BUFFER :** 4 Kbytes

**NV IMAGE MEMORY :** 256 Kbytes(Mono) / 128Kbytes(Color)

**USER DEFINE BUFFER :** 12 Kbytes

**EMULATION :** ESC/POS™

**DRIVER :** Windows, OPOS, JPOS, Linux CUPS(Linux kernel  
2.4.18 and later), Mac Driver

**SENSOR :** Paper Near End Sensor, Paper End Sensor,  
Cover Open Sensor

**DRAWER PORT :** 2 ports

**POWER SUPPLY (SMPS) :** AC 100-240V / DC 24V, 2.5A

**DIMENSIONS :** 145 x 203 x 146 (W x L x H mm)

**OPERATING TEMPERATURE :** 0 ~ 45°C

### OPTION

- SMPS BUILT-IN COVER (RSB-350)
- WALL MOUNT (RWM-350)
- BIXOLON MELODIST (RMB-100)
- VERTICAL STAND (RVS-350)



**BIXOLON®** [www.bixolon.com](http://www.bixolon.com)

This publication contains product descriptions without obligation.  
All features and specifications are subject to change without notice. July 2011

#### BIXOLON Headquarters

Address 7-8th FL, Miraasset Venture Tower, 685, Sampyeong-dong,  
Bundang-gu, Seongnam-si, Gyeonggi-do, 463-400, KOREA  
Tel +82 (0) 31 218 5500 Fax +82 (0) 31 218 5589  
E-mail [sales@bixolon.com](mailto:sales@bixolon.com)

#### BIXOLON America Inc.

Address 3171 Fujita St Torrance,  
CA 90505  
Tel +1 858 764 4580 Fax +1 310 257 6869  
E-mail [sales@bixolonusa.com](mailto:sales@bixolonusa.com)

#### BIXOLON Europe GmbH

Address Tiefenbroicher Weg 35,  
40472 Düsseldorf  
Tel +49 211 68 78 54 0 Fax +49 211 68 78 54 20  
E-mail [sales@bixolon.de](mailto:sales@bixolon.de)